

# Numerical Investigation using Trigonometric Cubic Spline Method for Boundary Layer Flow across a Stretching Cylinder

Tahera Begum<sup>1\*</sup>

<sup>1</sup>Department of Mathematics, Jamia Millia Islamia,  
New Delhi-110025, India

**Abstract:-** In this paper, the boundary layer flow of a viscous incompressible fluid across a stretching cylinder has been considered to investigate the flow field. Because the dynamic region is nonlinear, the velocity function has been calculated numerically using the trigonometric cubic spline method. The expression of skin friction was also obtained. Graphs have been used to analyze the velocity profile on the dimensionless parameter.

**Keywords:-** Stretching Cylinder, Boundary Layer Flow, Cubic Spline, Skin Friction. *Mathematics Subject Classification:* 65D07 ;65L10; 65L12; 65L20; 80A20; 76D05.

## I. INTRODUCTION

In fiber technology and extrusion operations, the boundary layer flow caused by stretching flat plates or cylinders is theoretically as well as practically significant and fascinating. This method is used to produce plastic films and polymer sheets. Examples include the aerodynamic extrusion of plastic sheets, the cooling of an infinite metallic plate in a cooling bath, the boundary layer in condensation processes along a liquid film, the blowing of glass, the spinning of metal, the drawing of plastic films, and the extrusion of polymers. It was Sakiadis (1961) who first brought the boundary layer flow on a moving continuous solid surface into consideration. Using a stretching sheet with linearly variable surface speed, Crane (1970) expanded this idea and provided an exact solution for the steady two-dimensional flow across a stretching surface in a quiescent fluid. A similarity solution is one that, typically through a coordinate transformation, reduces the number of independent variables by at least one. The concept is similar to dimensional analysis, except the coordinates themselves are reduced into dimensionless units that scale the velocities rather than parameters, such as the Reynolds number, see F. M. White (2006).

The works of Weyl (1942), Coppel (1960), Lin and Chen (1998), Liab (1999), Partha et al. (2005), Anderson (2005), Ishak (2009), Kudenatti (2012) and Rangi et al. (2012) have discussed the boundary layer flow caused by a stretching vertical surface in a quiescent viscous and incompressible fluid when the buoyancy forces are taken into account. The laminar boundary layer and heat transfer along horizontally and vertically moving cylinders with constant velocity were examined by Lin and Shih (1980, 1981) who discovered that

the cylinder's curvature effect prevented the similarity solutions from being reached. Because the primary differential equations governing fluid motion in hydrodynamics contain nonlinear components, an exact solution is necessary. It becomes challenging, if not impossible, to find the closed-form solution to such types of differential equations. This leads to the researchers arriving to obtain the solution for similarity. Researchers such as Chen and Char (1988), Wang (1981), Magyari and Keller (2000), Vajravelu and Cannon (2006), Ahmad et al. (2010), Bachok et al. (2012), Khan et al. (2012) and Begum et al. (2020) investigated these types of nonlinear problems using numerous numerical approaches such as Begum et al. (2023), Alam et al. (2020), Alam et al. (2021) and Alam et al. (2022) to find the solution.

In this paper, we determine the velocity component of boundary layer flow past a stretching cylinder moving continuously. Because of the nonlinearity present in the flow problem, we employ the trigonometric cubic spline method to investigate the impact of velocity.

This paper is arranged as follows: Section 2 portrays the mathematical modelling for the flow problem. In section 4 we have derived the trigonometric cubic spline method. The error analysis is given in section 5. In section 6, numerical experiments of the flow problem are given by displaying the numerical values of velocity functions through tables and figures and is discussed briefly. In Section 7, we present the conclusion.

## II. MATHEMATICAL FORMULATION OF THE PROBLEM

Consider an axisymmetric, continuous boundary layer flow of a viscous incompressible fluid past a continuously stretched cylinder. The stretching velocity  $W(x)$  is expressed as the relation  $W(x) = \frac{W_0(x)}{l}$ , where  $l$  is the characteristic length and  $W_0 > 0$  is a constant. With these presumptions along with the boundary layer estimations, the model equation can be written as follows:

$$\frac{\partial}{\partial x}(rw) + \frac{\partial}{\partial r}(rv) = 0 \quad (1)$$

$$w \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial r} = \frac{v}{r} \frac{\partial}{\partial r} \left( r \frac{\partial w}{\partial r} \right), \tag{2}$$

With boundary conditions (BCs)

$$r = R, \quad w(0) = w(x), \quad v(0) = 0, \tag{3}$$

$$r \rightarrow \infty, \quad w(r) \rightarrow 0, \tag{4}$$

Where the velocity components in the  $x$  and  $r$  directions are represented by the variables  $w$  and  $v$ , respectively.

By implementing a stream function,  $\chi$ , such that  $u = \frac{1}{r} \frac{\partial \chi}{\partial r}$  and  $v = -\frac{1}{r} \frac{\partial \chi}{\partial x}$ , the continuity equation (1) can be satisfied. We define  $\lambda$  and  $\chi$  as

$$\lambda = \frac{r^2 - R^2}{2R} \left( \frac{U}{\nu x} \right)^{\frac{1}{2}},$$

$$\chi = R(U\nu x)^{1/2} V(\lambda),$$

So that the momentum equation becomes

$$(1 + 2\alpha\lambda)V''''(\lambda) + 2\alpha V''(\lambda) + V(\lambda)V''(\lambda) - V'^2(\lambda) = 0, \tag{5}$$

With relevant BCs:

$$\lambda = 0, \quad V(\lambda) = 0, \quad V'(\lambda) = 1, \tag{6}$$

$$\lambda \rightarrow \infty, \quad V'(\lambda) = 0 \tag{7}$$

A non-linear boundary-value problem (bvp) in an infinite domain is illustrated by Equations (5) with (6) and

$$A_i(\lambda) = C_{1i} \sin \omega(\lambda - \lambda_i) + C_{2i} \cos \omega(\lambda - \lambda_i) + C_{3i}(\lambda - \lambda_i) + C_{4i}, \tag{11}$$

where  $C_{ji}, j = 1,2,3,4$ , are real finite constants and  $A_i(\lambda)$  has been interpolated at the mesh points  $\lambda_i$  which depends on the parameter  $\omega$ .

$$A_i(\lambda_i) = V_i, \quad A'_i(\lambda_i) = E_i, \quad A''_i(\lambda_i) = F_i, \quad i = 0,1,2, \dots, M \tag{12}$$

Using the conditions given in equation (12) in the equation (11), we obtain the values of the co-efficients  $C_{ji}$ ,

$$\tau_1 E_i + h E_{i+1} = -2(V_{i-1} - V_i) + \alpha_1 F_{i-1} + \alpha_1 F_i, \tag{13}$$

$$\tau_2 E_i - h E_{i+1} = (V_{i-1} - 2V_i + V_{i+1}) + \alpha_2 F_{i-1} + \alpha_3 F_i + \alpha_4 F_{i+1} \tag{14}$$

Where,

$$\tau_1 = \frac{h - h \cos \omega h - h \sin \omega h}{1 - \cos \omega h},$$

$$\tau_2 = -h \cos \omega h,$$

$$\alpha_1 = \frac{2 - 2 \cos \omega h - h \omega \sin \omega h}{h \omega^3 \sin \omega h},$$

(7). We solve this nonlinear bvp numerically using the finite difference method for various curvature parameters  $\alpha$ , since there are no conventional methods for handling such problems.

### III. SKIN FRICTION

To compute the surface shear stress, let

$$\tau_w = -\mu \left( \frac{\partial u}{\partial r} \right)_{r=R} \tag{8}$$

$$\text{or, } \tau_w = -\mu U \left( \frac{m}{\gamma} \right)^{\frac{1}{2}} V''(0), \tag{9}$$

Hence, for the given bvp, the skin friction co-efficient is

$$C_V = -(R_e^{-1}) \left( \frac{m}{\gamma} \right)^{\frac{1}{2}} V''(0). \tag{10}$$

### IV. TRIGONOMETRIC CUBIC SPLINE METHOD (TCSM)

To obtain trigonometric cubic spline approximation of the equations (5)-(7), we divide the interval  $[a, b]$  into  $M$  equal subintervals as follows:

$$\lambda_i = ih, \quad i = 0(1)M, \quad h = \frac{b - a}{M}$$

Now, using the non-polynomial spline  $A_i(\lambda)$  we construct a numerical algorithm to interpolate the unknown function  $V(\lambda)$  at the grid points  $\{\lambda_i | i = 1,2,3 \dots, M\}$  given as:

The coefficients  $C_{ji}, j = 1,2,3,4$ , have been obtained by using the following interpolation conditions:

$j = 1,2,3,4$ . Further, following the continuity condition defined for spline as well as its derivatives, the relations have been obtained as:

$$\alpha_2 = \frac{\sin\omega h - 2h\omega \cos\omega h}{2\omega^3}$$

$$\alpha_3 = \frac{h^2\omega^2 \cos\omega h - h\omega}{2\omega^3},$$

$$\alpha_4 = \frac{2\omega h - 2\sin\omega h}{2\omega^3}.$$

Solving the equations (13) and (14), we obtain the relation

$$-V_{i-2} + 3V_{i-1} - 3V_i + V_{i+1} = h^3(\xi_1 F_{i-2} + \xi_2 F_{i-1} + \xi_2 F_i + \xi_1 F_{i+1}), \quad i = 2(1)M - 1 \quad (15)$$

Where

$$\xi_1 = \frac{2 - 2\cos\omega h - h^2\omega^2}{2\omega^3 \sin\omega h},$$

$$\xi_2 = \frac{2h^2\omega^2 \cos\omega h + 2\cos\omega h - h^2\omega^2 - 2}{2h\omega^3 \sin\omega h}.$$

The equations in (15) yield  $(M - 2)$  linear equations involving  $M$  unknowns in  $V_i, i = 1, 2, 3, \dots, M$ .

In order to solve the system of equations, we need two additional equations, which can be obtained as:

$$\sum_{k=0}^2 \beta_{1k} V_k + \beta_2 h V'_0 + h^3 \sum_{k=0}^3 \beta_{3k} V_k''' - t_1 = 0, \quad i = 1 \quad (16)$$

$$\sum_{k=M-2}^M \beta_{4k} V_k + \beta_5 h V'_M + h^3 \sum_{k=M-3}^M \beta_{6k} V_k''' - t_M = 0, \quad i = M. \quad (17)$$

Now, implementing the above method in the equations (5)-(7), and with the help of Newton-Raphson method we find

the approximate solution to (5)-(7), which is computed with the help of MATLAB.

### V. ERROR ANALYSIS

➤ *Expanding the Relation (15) by using Taylor's Expansion, We Deduce the Following Truncation Error of the Method:*

$$t_i = (1 - 2\xi_1 - 2\xi_2)h^3 V_i^{(3)} + \frac{1}{2}(-1 + 2\xi_1 + 2\xi_2)h^4 V_i^{(4)} + \frac{1}{4}(1 - 10\xi_1 - 2\xi_2)h^5 V_i^{(5)} + \frac{1}{12}(-1 + 14\xi_1 + 2\xi_2)h^6 V_i^{(6)} + \frac{1}{120}(3 - 35\xi_1 - 5\xi_2)h^7 V_i^{(7)} + O(h^8), \quad i = 2(1)M - 1.$$

For different values of  $\xi_1$  and  $\xi_2$ , second and fourth order methods can be obtained.

For  $\xi_1 = \frac{1}{12}$  and  $\xi_2 = \frac{5}{12}$ , second order method can be achieved which is given by:

$$t_i = -\frac{1}{6}h^5 V_i^{(5)} + O(h^6), \quad i = 2(1)M - 1.$$

For  $\xi_1 = 0$  and  $\xi_2 = \frac{1}{2}$ , fourth order method can be achieved which is given by:

$$t_i = -\frac{1}{240}h^7 V_i^{(7)} + O(h^8), \quad i = 2(1)M - 1.$$

### VI. NUMERICAL EXPERIMENTS AND DISCUSSIONS

Here, we study the results obtained by the proposed numerical method for the model problem (5)-(7) at different grid points on the interval  $[0, 8]$ . MATLAB is used to produce a graphical depiction of the various components for different values of  $\alpha$ . Figure 1 and Figure 2 displays the numerical findings of  $V(\lambda)$  and  $V'(\lambda)$  for various values of the parameter  $\alpha$ . Additionally, Figure 3 provides a graphical depiction of  $V''(\lambda)$  that illustrates the impact of the velocity component  $V''(\lambda)$  when  $\alpha$  fluctuates.

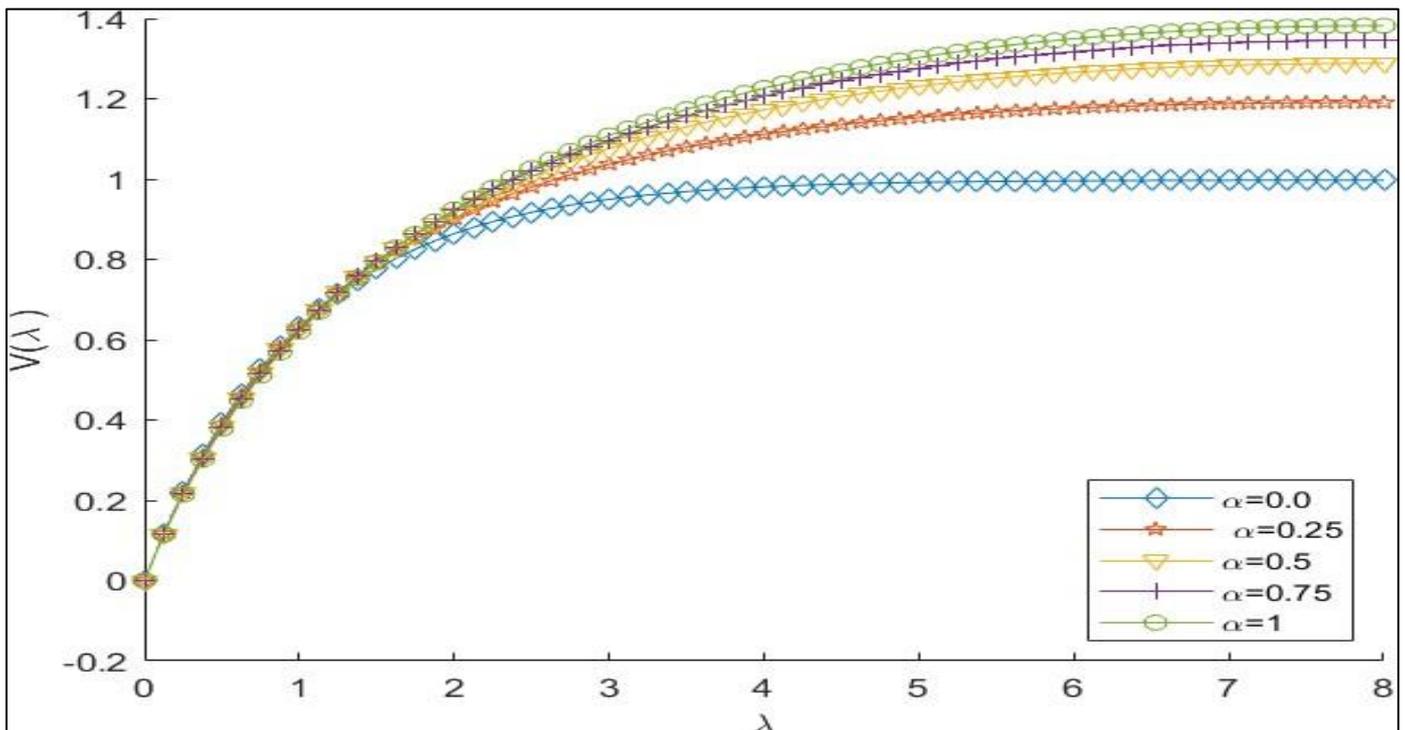


Fig 1:  $V(\lambda)$  As the Value of  $\alpha$  Varies

With reference to Figure 1, we observe that the horizontal velocity profile has not been affected by the curvature parameter inside the dynamic area  $[0, 1.5]$ , following this, the velocity profile decreases as the curvature of the stretching cylinder reduces. The outside surface of the

cylinder acts as a flat surface when we take  $\alpha \rightarrow 0$ . This indicates that as  $\alpha \rightarrow 0$ , the viscosity effect decreases because fluid-contact area of the surface moves toward the tangential position.

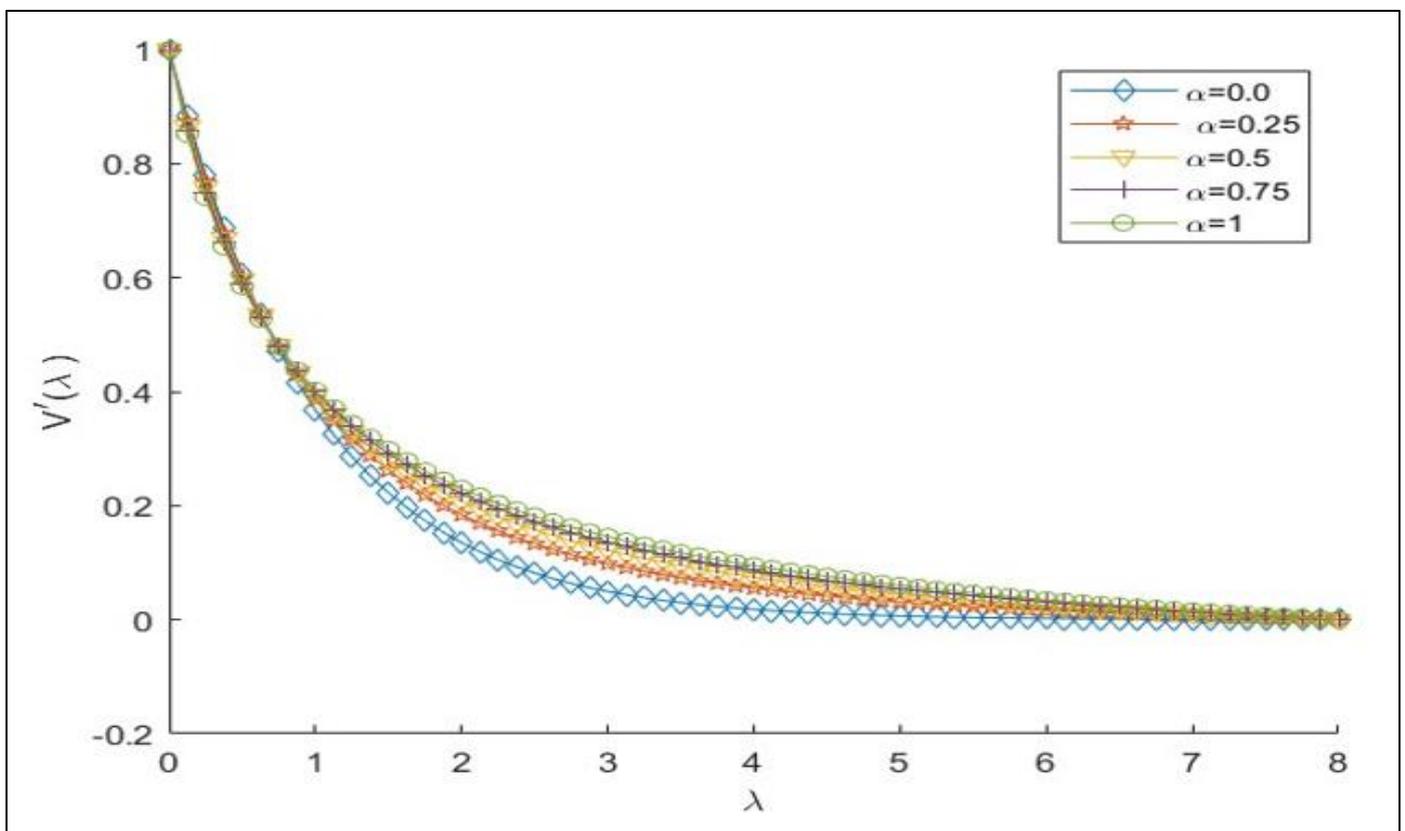
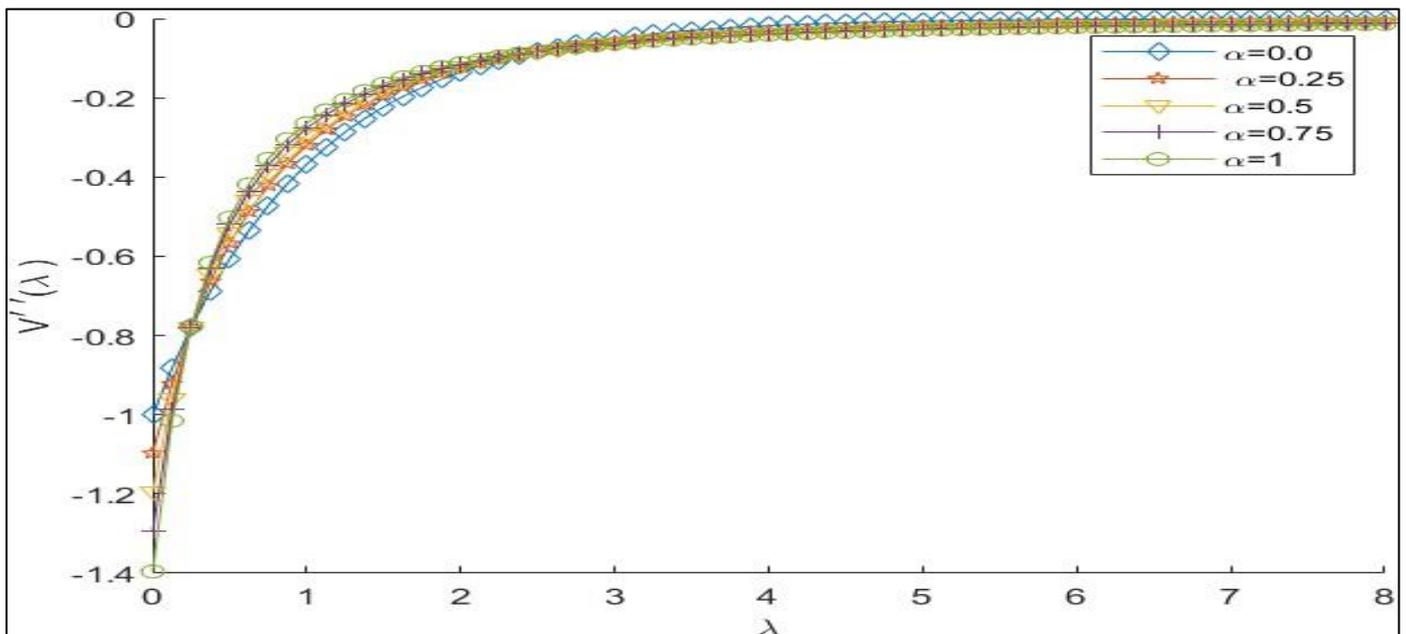


Fig 2:  $V'(\lambda)$  As the Value of  $\alpha$  Varies

Fig 3:  $V''(\lambda)$  as the Value of  $\alpha$  Varies

As we see in Figure 2, throughout the dynamic area  $[0, 1]$ , the curvature parameter has essentially negligible influence on the horizontal velocity profile of the velocity field. Within the region  $[1, \infty[$  the velocity component asymptotically approaches to zero. The velocity within  $[1, \infty[$ , in this case, is the free stream velocity and in this region as  $\alpha$  increases, the velocity profile increases. Figure 3 demonstrate the stress profile  $V''(\lambda)$  as the parameters  $\alpha$  varies..

## VII. CONCLUSION

In this paper, we use spline approach to solve the boundary layer flow past a stretching cylinder. We employ trigonometric cubic spline method (TCSM) is used to solve the problem for different values of parameter  $\alpha$ . Based on our approach, the results summarize that the curvature of the stretching cylinder is a crucial parameter that affects the flow.

## REFERENCES

- [1]. Ahmad, N., Siddiqui, Z.U. and Mishra, M.K. (2010), *Boundary layer flow and heat transfer past a stretching plate with variable thermal conductivity*, Int. J. Nonlin. Mech., 45, 306-309.
- [2]. Alam, M. P., Begum, T. and Khan, A. (2020), *A new spline algorithm for solving non-isothermal reaction diffusion model equations in a spherical catalyst and spherical biocatalyst*, Chem. Phys. Lett., 754, 137651.
- [3]. Alam, M. P., Begum, T. and Khan, A. (2021), *A high-order numerical algorithm for solving Lane–Emden equations with various types of boundary conditions*, Comput. Appl. Math., 40(6) 2413–2423.
- [4]. Alam, M. P., Khan, A. and Baleanu, D. (2022), *A high-order unconditionally stable numerical method for a class of multi-term time-fractional diffusion equation arising in the solute transport models*, Int. J. Comput. Math., 100(4).
- [5]. Anderson, J. D. (2005), *Ludwig Prandtl's boundary layer*, Physics Today 42, 42–48.
- [6]. Bachok, N., Ishak, A. and Pop, I. (2012), *Boundary layer stagnation-point flow and heat transfer over an exponentially stretching/shrinking sheet in a nanofluid*, Int. J. of Heat Mass Transf. 55, 8122 – 8128.
- [7]. Begum, T., Khan, A., and Ahmad, N. (2020), *A numerical study of boundary layer flow of viscous incompressible fluid past an inclined stretching sheet and heat transfer using nonpolynomial spline method*, Math. Method Appl. Sci., 43(17), 9948-9967.
- [8]. Begum, T., Manchanda, G., Khan, A., and Ahmad, N. (2023), *On numerical solution of boundary layer flow of viscous incompressible fluid past an inclined stretching sheet in porous medium and heat transfer using spline technique*, MethodsX, 10, 102035.
- [9]. Coppel, W. (1960), *On a differential equation of boundary-layer theory*, Phil. Trans. R. Soc. A 253 101–136.
- [10]. Chen, C. K. and Char, M. I. (1988), *Heat transfer of a continuous, stretching surface with suction or blowing*, J. Math. Anal. Appl. 135, 568 – 580.
- [11]. Crane, L. J. (1970), *Flow past a Stretching Plate*, Zeitschrift fur Angewandte Mathematik und Physik 21(4) 645–647.
- [12]. Ishak, A. (2009), *Mixed Convection Boundary Layer Flow over a Vertical Cylinder with Prescribed Surface Heat Flux*, Journal of Physics A: Mathematical and Theoretical 42(19) 1 – 8.
- [13]. Khan, M., Gondal, M.A., Hussain, I. and Vanani, S.K. (2012), *A new comparative study between homotopy analysis transform method and homotopy perturbation transform method on a semi infinite domain*, Math. Comput. Modelling 55 (3) 1143–1150.
- [14]. Kudenatti, R.B. (2012), *A new exact solution for boundary layer flow over a stretching plate*, Int. J. Non-Linear Mech. 47 (7) 727–733.

- [15]. Liao, S. (1999), *A uniformly valid analytic solution of two-dimensional viscous flow over a semi-infinite flat plate*, J. Fluid Mech. 385 101–128.
- [16]. Lin, C. R. and Chen, C. K. (1998), *Exact Solution of Heat Transfer from a Stretching Surface with Variable Heat Flux*, Heat Mass Transfer 33 477 – 480.
- [17]. Lin, H. T. and Shih, Y. P. (1980), *Laminar Boundary Layer Heat Transfer along Static and Moving Cylinder*, Journal of the Chinese Institute of Engineers 3(1) 73 – 79.
- [18]. Lin, H. T. and Shih, Y. P. (1981), *Buoyancy Effects on the Laminar Boundary Layer Heat Transfer along Vertically Moving Cylinders*, Journal of the Chinese Institute of Engineers 4(1) 47 – 51.
- [19]. Magyari, E. and Keller, B. (2000), *Exact solutions for self-similar boundary-layer flows induced by permeable stretching walls*, Eur. J. Mech. B. Fluids 19, 109 – 122.
- [20]. Partha, M. K., Murthy, P. V. S. N and Rajasekhar, G. P. (2005), *Effect of Viscous Dissipation on the Mixed Convection Heat Transfer from an Exponentially Stretching Surface*, Heat Mass Transfer 41(4) 360 – 366.
- [21]. Rangi, R. R. and Ahmad, N. (2012), *Boundary Layer Flow past a Stretching Cylinder and Heat Transfer with Variable Thermal Conductivity*, Appl. Math. 03(03), 205-209.
- [22]. Sakiadis, B. C. (1961), *Boundary layer behavior on continuous solid surfaces: I. Boundary layer equations for two dimensional and axisymmetric flow*, American Inst. Chemical Eng. J. 7(2) 221–225.
- [23]. Vajravelu, K. and Cannon, J.R. (2006), *Fluid flow over a nonlinearly stretching sheet*, Appl. Math. Comput. 181, 609 – 618.
- [24]. Wang, C.Y. (1989), *Free convection on a vertical stretching surface*, J. Appl. Math. Mech. (JAMM) 69, 418 – 420.
- [25]. Weyl, H. (1942), *On the differential equations of the simplest boundary layer problem*, Ann. of Math. 43 381–407.
- [26]. White, F. M. (2006), *Viscous Fluid Flow*, Mc Graw Hill, New York.